


ナニワ規格シャックル:SDシャックル



■寸法図

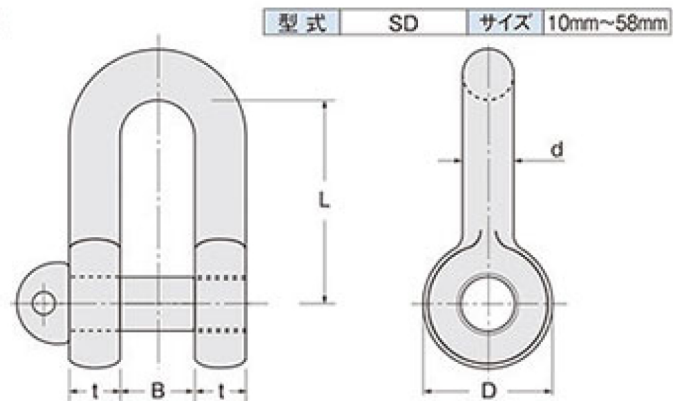

単位: mm

呼び	使用荷重		t・d	B (口幅)	D (頭径)	L (長さ)	穴径	ピン径	ねじ径	重量 (kg)
	tf	kN								
10	0.4	3.92	10	20	23	40	13	12	M12	0.14
12	0.6	5.88	12	24	28	48	16	15	M14	0.23
14	0.8	7.84	14	28	32	56	18	17	M16	0.37
16	1	9.8	16	32	36	64	21	20	M20	0.53
20	1.5	14.7	20	40	44	80	25	24	M24	1.0
22	2	19.6	22	44	50	88	28	27	M27	1.4
24	2.5	24.5	24	48	56	96	30	29	M27	1.9
26	3	29.4	26	52	62	104	33	32	M30	2.4
28	3.5	34.3	28	56	65	112	35	34	M33	2.9
30	4	39.2	30	60	70	120	37	36	M36	3.6
34	5	49	34	68	80	136	43	42	M42	5.3
38	6	58.8	38	76	85	152	46	45	M45	7.3
40	7	68.6	40	80	92	160	49	48	M48	8.5
42	8	78.4	42	84	100	168	53	51	M48	10.1
48	10	98	48	96	110	192	60	58	M56	14.4
52	12	117.6	52	104	120	208	64	62	M56	19.9
58	15	147	58	116	132	232	70	68	M64	26.1